



7075 Aluminium Coils Bright Anodized Aluminum Coil 600mm

Our Product Introduction

Basic Information

- Place of Origin: Jiangsu,China
- Brand Name: LIANZHONG
- Certification: ISO9001
- Model Number: 1000series, 2000series, 3000series, 5000series, 6000series, 7000series
- Minimum Order Quantity: 3ton
- Price: Negotiable
- Packaging Details: Exporting package/wooden box package etc
- Delivery Time: 3-15 days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 20000 Ton/Tons per Month



Product Specification

- Width: 600mm-2600mm
- Surface Treatment: Coated
- Alloy Or Not: Is Alloy
- Standard: ASTM
- Application: Aircraft Industry
- Tolerance: $\pm 1\%$
- Highlight: **7075 aluminium coils, coil coated aluminium 600mm, Bright anodized aluminum coil**



for more products please visit us on aluminium-sheetcoil.com

Product Description

ASTM 7075 Aluminium Alloy Coil 600mm For Aircraft Industry

What is an aluminium coil?

Aluminum coil refers to sheets of flattened aluminum that have been rolled (or coiled), with the width of the sheet being much greater than its thickness. As shown in Figure 1, an aluminum coil is simply an aluminum sheet wound on a core.

What are aluminium coils used for?


In addition, most construction projects use an aluminum coil to create structures, doors, windows, ceilings, curtain wall profiles, pressure plates, color coating sheets, etc., and surface decoration.


Can aluminium coil be welded?

The best methods for making field repairs of punctures in aluminum refrigeration coils, for example are the conventional metal-repair "Standbys" - soldering and welding and the now-familiar adhesive bonding. All are accomplished using simple procedures, properly applied to a clean aluminum surface.


Aluminum Coil			
Aluminium Alloy	Thickness (mm)	Width (mm)	Temper
A1050,A1060,A1070,A1100	0.2-8.0	20-2300	O,H12,H14,H16,H18,H22,H24,H26
A3003,A3004,A3105	0.2-8.0	20-2300	O,H12,H14,H16,H18,H22,H24,H26
A5052,A5005,A5083,A5754	0.2-8.0	20-2300	O,H12,H14,H34,H32,H36,H111,H112
A6061,A6082,A6063	0.2-8.0	20-2300	T4,T6,T651
A8011	0.2-8.0	20-2300	O,H12,H14,H16,H18,H22,H24,H26
Material process	CC AND DC		
Customerize size	Size can be produced as per clients requirement		
Surface	Mill finish ,Color coated(PVDF& PE),Stucco Embossed ,Bright Polish,Anodizing		
	Mirror,Brush,Perforated,Tread plate ,Corrugated etc		
Quality Standard	ASTM B209,EN573-1		
MOQ per size	1 ton		
Payment Terms	TT OR LC at sight		
Delivery time	Within 25 days after receipt the lc or deposit		
Material Quality	Tension levelled ,flat ,Free of defects like oil stain,Roll Marks,Waves,Dents		
	scratches etc ,A+++ quality, production process passed sgs and bv inspection		
Application	Construction ,Building,Decoration ,Curtain Wall ,Roofing,Mould,Lighting,		
	curtain wall, ship building,Aircraft,Oil Tank ,Truck Body etc		
Packing	Standard export worthy wooden pallets and standard packing is about 2 tons/pallet		
	Pallet weight also can be as per client's requirement		

Product Details

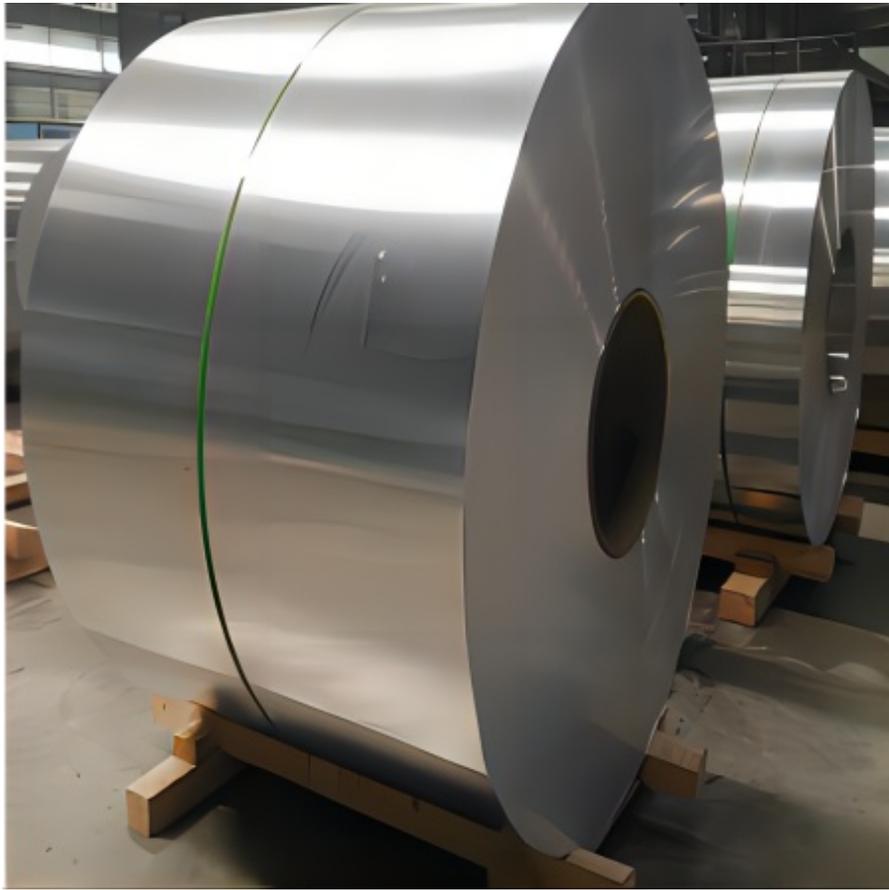

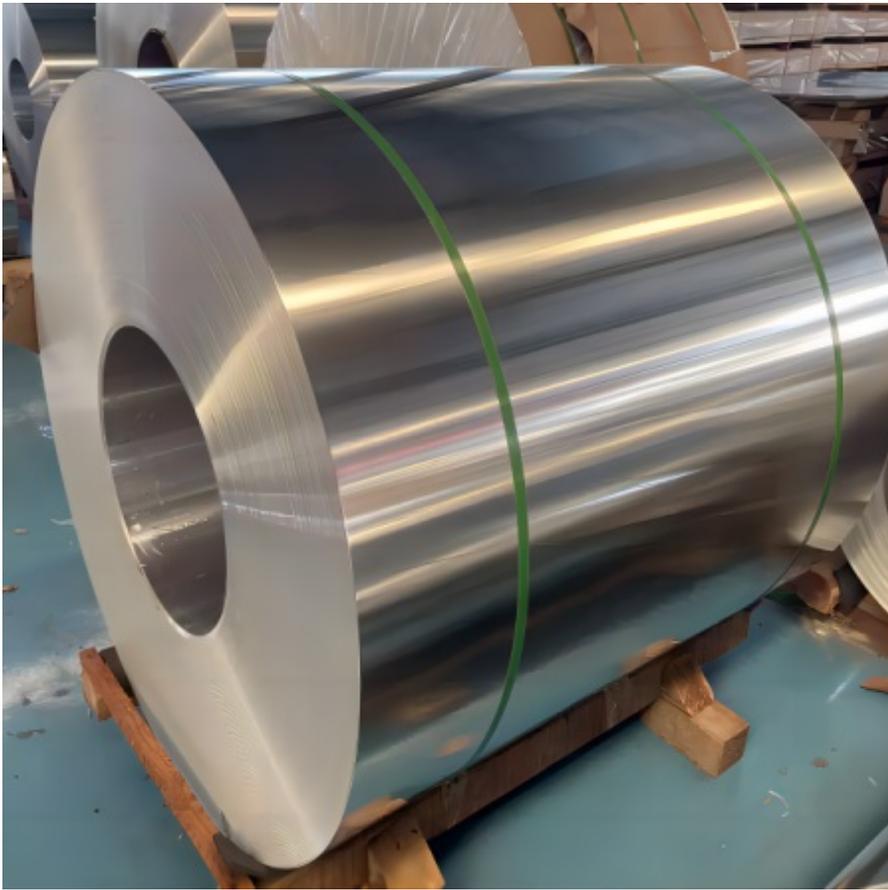

Packing and Shipment



Certification

OUR CERTIFICATE



JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD



+8618151700330



sales02@jslzsteel.com



aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China