




5mm 10mm Thick Aluminium Flat Sheet 5052 5005 Processing Anodized Iso Certificate

Our Product Introduction


Basic Information

- Place of Origin: Jiangsu, China
- Brand Name: LIANZHONG
- Certification: ISO9001
- Model Number: 5052 5005
- Minimum Order Quantity: 1ton
- Price: Negotiable
- Packaging Details: Exporting package/wooden box package/Or per customers' requirement
- Delivery Time: 3-15 days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 2000 Ton/Tons per Month

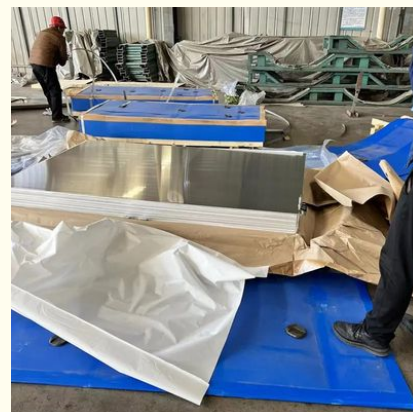

Product Specification

- Product Name: Aluminum Sheet
- Thickness: 0.6-100mm Or As Required
- Alloy Or Not: Alloy
- Shape: Flat Plate
- Delivery Time: 7-15 Days, depends On The Quantity
- Processing Service: Bending, Decoiling, Welding, Punching, Cutting
- Highlight: **5mm aluminium flat sheet, anodized 5005 aluminium flat sheet, 10mm flat aluminum plate**

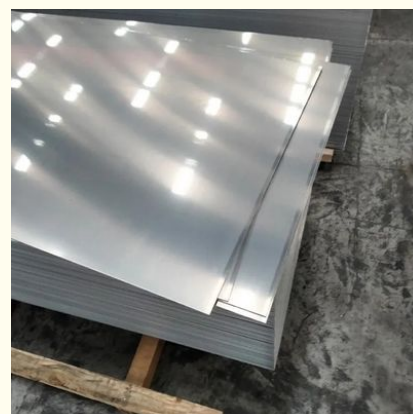

for more products please visit us on aluminium-sheetcoil.com

Product Description


5mm 10mm Thick Aluminium Sheet 5052 5005 Alloy Plate Processing Anodized ISO Certificate

Product Description

5000 series aluminum has excellent corrosion resistance and is widely used in the manufacture of transport vehicles, tanks, ships and bridges. Aluminum magnesium are the main element that makes up the 5000 series grades of aluminum, with magnesium additions ranging from 0.2% to 6.2%, covering popular alloy models such as 5005, 5052, 5083, 5754, etc.

5000 Series Alloy (Generally called Al-Mg Alloy, the Mg is used as main alloy element)	
Alloy	5005 5052 5083 5086 5182 5754 5154 5454 5A05 5A06
Temper	O/H111 H112 H116/H321 H12/H22/H32 H14/H24/H34 H16/H26/H36 H18/H28/H38 H114/H194, etc.
Specification	Thickness≤100mm; Width≤2200mm ; Length≤12000mm
Application	Marine Grade Plate, Ring-Pull Can End Stock, Ring-Pull Stock, Automobile Body Sheets, Automobile Inside Board, The Protective Cover On Engine.
Feature	All the advantages of normal aluminium alloy, high tensile strength & yield strength, good corrosion resistant performance, well welding property, well fatigue strength, and suitable for anodic oxidation.


Product Details

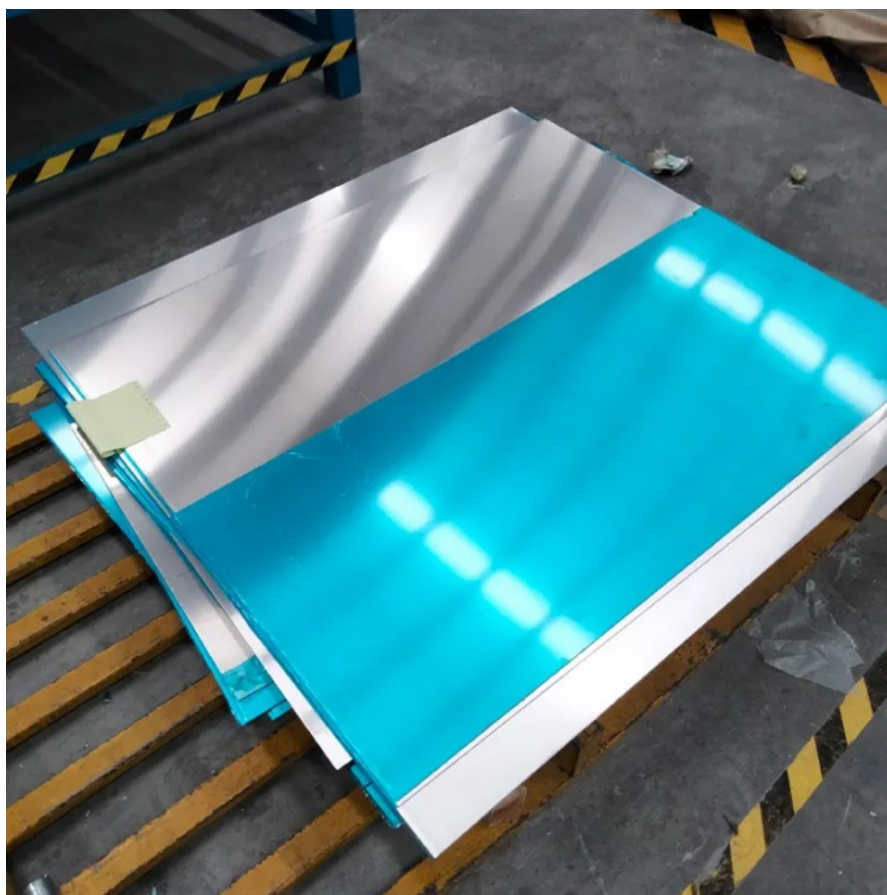

Application



Recommend Products

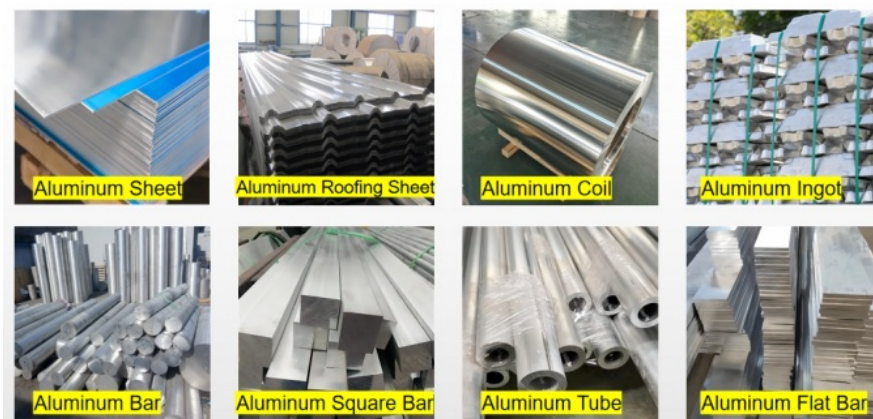

Packing & Shipping

20ft GP:5898mm(Length)x2352mm(Width)x2393mm(High), about 24CBM,27MTS
 40ft GP:12032mm(Length)x2352mm(Width)x2393mm(High) ,about 54CBM,27MTS
 40ft HC:12032mm(Length)x2352mm(Width)x2698mm(High), about 54CBM,27MTS





Certification



FAQ

1. How can I get a quotation from you ?
You can leave us message, and we will reply every message in time. Or we may talk on line by Trademanager. And you can also find our contact information on contact page.
2. Can I get samples before order ?
Yes, of course. we can produce by your samples or technical drawings.
3. What is your delivery time ?
The time of delivery is usually around 7-10 days. We can send out in 2-5 days, if it has stock.



JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD



+8618151700330



sales02@jslzsteel.com



aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China