




Galvanized 0.1 Mm Aluminium Foil 1145 Eco Friendly Good Tensile Strength

Our Product Introduction

Basic Information

- Place of Origin: Jiangsu, China
- Brand Name: LIANZHONG
- Certification: ISO9001
- Model Number: 1000series, 2000series, 3000series, 5000series, 6000series, 7000series
- Minimum Order Quantity: 1ton
- Price: Negotiable
- Packaging Details: Exporting package/wooden box package/Or per customers'requirement
- Delivery Time: 3-15 days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 20000 Ton/Tons per Month

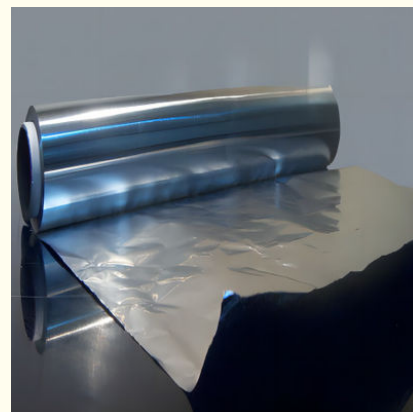

Product Specification

- Place Of Origin: Jiangsu, China
- Color: Silver
- Application: Food Cooking
- Type: Foil
- Model Number: 3004
- Feature: Eco-Friendly
- Highlight: **Galvanized aluminium foil 1145, 0.1 mm aluminium foil 1145, Eco Friendly 1145 aluminum foil**



Product Description

ASTM 1145 Soft Aluminium Foil 0.1mm Thickness For Widely Use

Aluminum foil refers to the thin strip of aluminum and aluminum alloy with thickness $\leq 0.2\text{mm}$. Its hot stamping effect is similar to that of sterling silver foil, so it is also called false silver foil. Because aluminum is soft, malleable and has a silver luster, it can also be printed if the rolled sheet is mounted on offset paper with sodium silicate and other substances to make aluminum foil sheets. Aluminum foil is generally classified by thickness, condition and purpose.

According to thickness: where greater than 0.012mm aluminum foil called single foil, less than or equal to 0.012mm called double foil; There is also a thickness after the decimal point with a 0 called single zero foil, after the decimal point with two 0 called double foil.

According to the state: can be divided into full hard foil, soft foil, semi-hard foil, 3/4 hard foil, 1/4 hard foil. Fully hard foils are unannealed foils rolled (fully annealed strip and cold rolled by $> 75\%$); Soft foil refers to the foil that has been completely annealed after cold rolling. Where aluminum foil tensile strength between hard foil and soft foil called semi-hard foil; Where the tensile strength is between full hard foil and semi-hard foil is 3/4 hard foil; The tensile strength of aluminum foil between soft foil and semi-hard foil is called 1/4 hard foil.

According to the surface state: can be divided into single-sided light foil and double-sided light foil. Aluminum foil rolling is divided into sheet rolling and double rolling, sheet rolling, both sides of the foil and roll surface contact, both sides have bright metal luster, known as double-sided light foil. In double rolling, only one side of each foil contacts with the roll, and the side that contacts with the roll is bright, and the two sides that contact with each other between the aluminum foil are dark. This foil is called single side light foil. The minimum thickness of double-sided foil mainly depends on the diameter of the work roll, usually no less than 0.01mm , the thickness of single-sided foil is usually no more than 0.03mm , the current minimum thickness can reach 0.004mm .


Spangle	Big, small regular spangle and zero spangle
Surface Treatment	Chromate, Galvanized, Skin Pass, Passivity and Oiled(un-oiled)
Coil Weight	3--5 Metric Tons and as requirements
Application	Used for PPGI ,General use, Color coating, Corrugated Roofing making, Outside of the buildings Structure, Deep Drawing and etc.
Ambition	Reliable product, Competitive price, On-time delivery and High standard service.
Protective film	PE or PVC

Product Details





Manufacturing Process

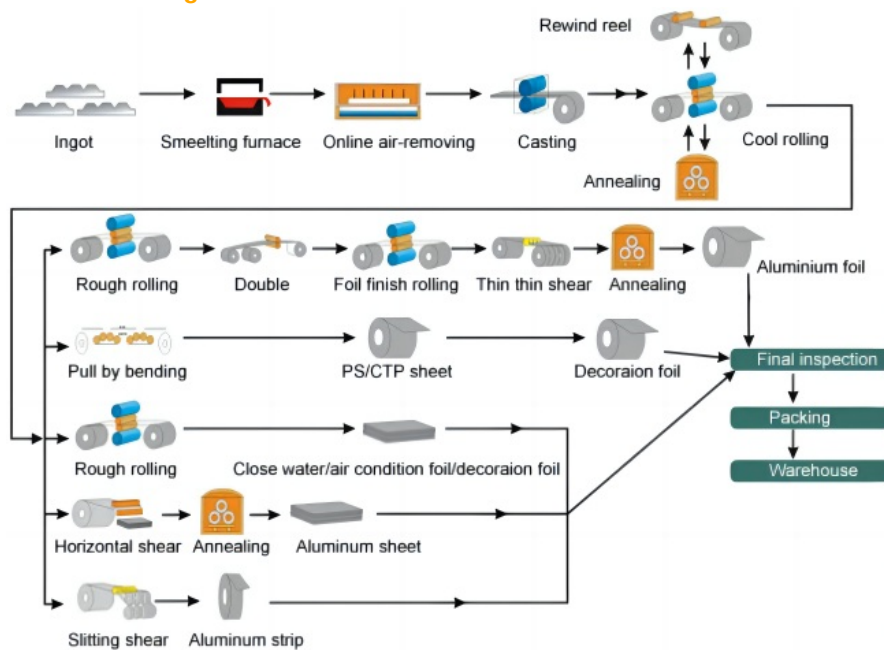

Packing



Certification



华鼎四海
Huadingsihai

QUALITY MANAGEMENT SYSTEM CERTIFICATE

This is to certify that

Jiangsu Lianzhong Metal Products (Group) Co., Ltd

Unified social credit code:91320213MABPEEF263

Registered Address:287 Guangyi Road, Liangxi District, Wuxi, Jiangsu

Audited Address:287 Guangyi Road, Liangxi District, Wuxi, Jiangsu

Has been assessed as conforming to meet the requirements of
GB/T19001-2016 / ISO9001:2015

for the scope of activities

**Metal coils, metal pipes, metal bars, metal sheets involved in the sale of related
management activities**

Certificate No:609-22-QR-08513-R0-S

Issue Date:2022-12-28

Term of validity:2025-12-27



中国认可
国际互认
管理体系
MANAGEMENT SYSTEM
CNAS C256-M

Certificate issuer:

gaofei

Company stamp:



Note: Every year, supervision and audit are required, and the certificate of conformity is valid. The status of the certificate can be scanned and can also be confirmed on the company website hdccso.com and the official website of the National Certification and Supervision Commission at www.cnca.gov.cn.

ADD: 608, floor 6, building 1, Yard 18, Huanjing road, Tongzhou District, Beijing
TEL: 010-80820858 E-mail: HDCCRZ@163.com



JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD



+8618151700330



sales02@jsslsteel.com



aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China