

GB 50mmx50mm 6061-T6 Aluminium Angle 5mm Thickness For **Decorations**


Basic Information

- Place of Origin:
- Brand Name:
- Jiangsu, China LIANZHONG ISO9001 Certification: 1000series, 2000series, 3000series, Model Number: 5000series, 6000series, 7000series • Minimum Order Quantity: 1ton • Price: Negotiable • Packaging Details: Exporting package/wooden box package/Or per customers'requirement • Delivery Time: 3-15 days L/C, T/T, Western Union • Payment Terms: • Supply Ability: 20000 Ton/Tons per Month



Product Specification

 Alloy Or Not: 	Is Alloy
• Tolerance:	±5%
 Application: 	Industrial
• Shape:	Customized
 Surface Treatment: 	Customized
• Feature:	Eco-Friendly
 Highlight: 	50mmx50mm 5mm aluminium angle, 6061-T6 5x5 aluminum angle, Decorations aluminium angle 5mm




GB 50mmx50mm 6061-T6 Aluminium Angle 5mm Thickness For Decorations

Angle aluminum conventional specifications no industrial aluminum profile, because rarely used, general specifications in 20 to 50 section, thickness of 2 mm to 5 mm, generally in the equipment frame above rarely used, mainly used for connecting parts, after processing can be used for connecting parts, can be customized size, cutting, drilling and other deep processing processes, used for connecting parts between two profiles, Its thickness range is more, can meet the connection strength.

	GB 50mmx50mm 6061-T6 Aluminium Angle 5mm Thickness For Decorations	
Name		
Alloy	100% Aluminium Profile Alloy :6063-T5,6061-T6,6463-T5,7075-	
	T6,6082,5052,2024,7005,6013,7020 etc	
a	GB5237.1-2008	
Certific ation	ISO:9001, ISO:14001, TUV, CE, BV certificate	
MOQ	500KG for each profile	
Export Length	5.8m for 20GP , 5.85m/5.9m for 40GP/HQ	
Treatm ent	Anodized, Powder Coating, Electrophoresis, Normal/Fluorocarbon Powder Coated, Paper Transfer/PVDF Fluorocarbon Wood Grain, CP/SS Brushed, Satin Brushed, Golden Polished etc.	
Applicat ion	Furniture, Windows & Doors, Decorations ,Industry, Construction etc.	
	Normal surface color could sustain for 10 years indoor; for outdoor use, fluorocarbon type surface color could sustain for 10-15 years too.	
Our Service	Produce as per customer's designed drawings or real samples	
Packing	A. Inside : packed with plastic protective film or polybag or pearl wood to protect each profile; B. Outside: packed with waterproof craft paper	
	A. Moud Development and Sample test : 12-15days;	
	B. Production Duration: 25-30 days after sample is confirmed by Customer.	
Terms	30% down payment by T/T, balance shall be paid off by T/T before delivery.	
term	Final payment shall be based on final actual physical weighing.	
	4000 - 5000 metric tonnes per month.	
Establis hment	Since 1994	
rs	more than 700	
FOB Ports	Guangzhou / Foshan / Shenzhen	

Product Details

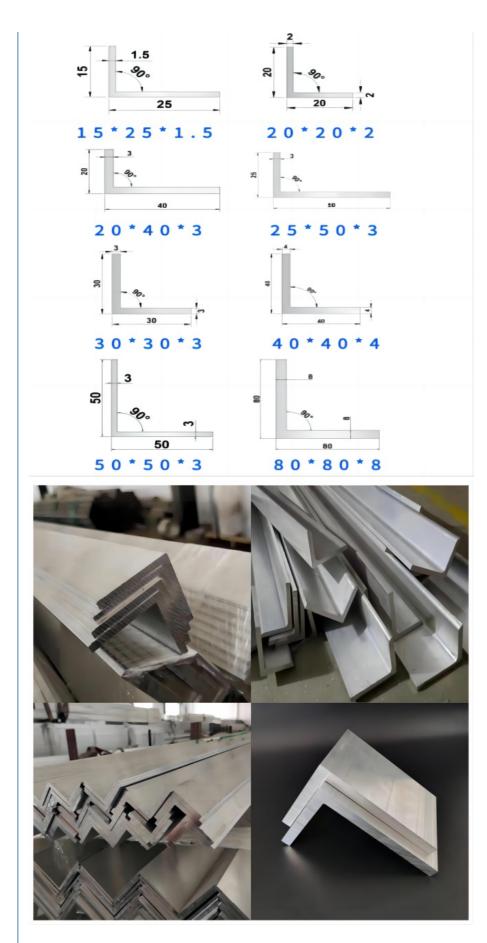

Packing



Certification



JANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD

