Dia 0.05 To 10mm Aluminium Wire ER4043 5356 5183 4047 Aluminum Welding Wire

Basic Information

- Place of Origin:
- Brand Name:
- Certification: ISO9001
- Model Number:
- Minimum Order Quantity: 3ton
- Price:

Our Product Introduction

- Packaging Details:
- Delivery Time:
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 20000 Ton/Tons per Month

Jiangsu, China

LIANZHONG

Negotiable

7-15 days

1000series, 2000series, 3000series,

5000series, 6000series, 7000series

Exporting package/wooden box package etc



Product Specification

- Standard:
- Grade:
- Tolerance:
- Application:
- Material:
- MOQ:
- Highlight:
- Aluminum Material 3 Ton 5183 aluminum welding wire, 5356 aluminium welding wire,

ER4043 Aluminium Wire

1000-6000 Series

1000

±1% Cable



High Quality ER4043 5356 5183 4047 Aluminium Welding Wire Price

Details

It is used for welding aluminum alloy in shipbuilding, offshore platform, railway locomotive and automobile manufacturing industry.

THS-AL5356 is aluminum magnesium alloy welding wire, which is used to weld aluminum magnesium alloy with high magnesium content. The welding wire has high strength, good malleability and excellent seawater corrosion resistance.

1. Before welding, the oxide, oil stain, moisture and other impurities on the welding joint and welding wire must be removed.

- 2. During welding, the base plate can be used to hold the molten metal to ensure the formation of the weld. 3. When oxyacetylene gas welding, aluminum gas welding flux must be used together.

ltem	Aluminum Wire				
Temper	F, O, H112, T3, T351, T4, T5, T6, T651, etc.				
Material	1000 Series:1010,1030,1050,1060,1080,1100,1235,1435,etc.				
	2000 Series:2011,2014,2017,2024,2124,2A12,2A16,2A06,etc.				
	3000 Series:3002,3003,3004,3005,3104,3105,3204,3030,3A21,etc.				
	4000 Series:4004,4005,4032,4043,4047,4A01,4A13,etc.				
	5000 Series:5005,5025,5040,5052,5056,5083,5754,5A05,etc.				
	6000 Series:6003,6060,6082,6083,6063,6061,6101,6A02,etc.				
	7000 Series:7003,7005,7050,7075,7475,7A01,7A03,7A05,etc.				
Diameter	0.05-10 mm				
Surface Finish	Brushed,polished,mill finish, power coated,sand blast				
Standard package	e Wooden pallets, Wooden cases or according to customer's requests				

Dimensions

ISIZE		Min. Number of Strands	Insulation Thickness	Nomina I O.D.	Weigh	Maximum conductor resistance at temperature 20C
AWG or kcmil	mm	n	mm	mm	kg/km	Ω/km
		35	3.04	19.3	583	0.232
300	14.48	35	3.04	20.6	669	0.194
350	15.65	35	3.04	21.7	754	0.166
500	18.69	35	3.04	24.8	1004	0.116
700	22.28	58	3.43	29.1	1387	0.0829

Product Details



Packing and Shipping




Recommend Products



Certificate



Production Line

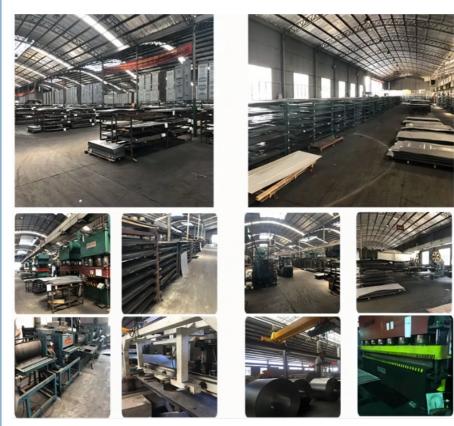

FAQ

- **Q: what is delivery time / lead time ?** A: 30 days
- **Q: what is your minimum order ?** A: 5000kgs

Q: what is your payment term ?

- A: 1- 30% down payment for order confirmation, 70% before shipment.
- 2- 100% at sight LC

Q: can we visit your factory ? A: yes you can at your free time.

JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China

- - -