

JIS 6063 Polished Aluminium Sheet 1500mm Width For Industry

Our Product Introduction

for more products please visit us on aluminium-sheetcoil.com


Basic Information

- Place of Origin: Jiangsu, China
- Brand Name: LIANZHONG
- Certification: ISO9001
- Model Number: 6063
- Minimum Order Quantity: 3ton
- Price: Negotiable
- Packaging Details: Exporting package/wooden box package etc
- Delivery Time: 3-15 days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 20000 Ton/Tons per Month





Product Specification

- Product Name: 6063 Aluminum Sheet
- Width: 10mm-2800mm
- Alloy Or Not: Is Alloy
- Place Of Origin: Jiangsu, China
- Delivery Time: Within 7 Days
- Model Number: 6063
- Highlight: Industry Aluminium Sheet 1500mm, Bright Polished Aluminum Plate, Polished 6063 Aluminum Sheet

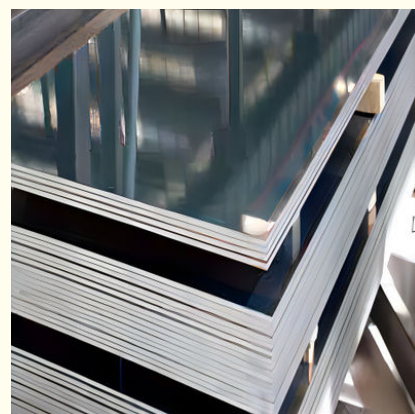

More Images




Product Description

JIS 6063 Aluminium Sheet 1500mm Width Polished Surface Used In Industry

6063 is the representative alloy for extrusion, the strength is lower than 6061, the extrusion property is good, can be used for complex section shape of the shape of the material, corrosion resistance and surface treatment are good. ② It is a low alloying Al-Mg-Si high plastic alloy. It has many valuable characteristics:

1. Heat treatment strengthening, high impact toughness, sensitive to lack.
2. It has good thermoplasticity and can be extruded into complex structure at high speed. Thin wall. Hollow profiles or forging into complex structure forgings, wide quenching temperature range, low quenching sensitivity, extrusion and forging after demoulding, as long as the temperature is higher than quenching temperature. Quenching can be done by spraying water or through water. Thin wall parts (6 less than 3mm) can also implement wind quenching.
3. Excellent welding performance and corrosion resistance, no stress corrosion cracking tendency. Among the aluminum alloys that can be strengthened by heat treatment, Al-Mg-Si alloy has no stress corrosion cracking phenomenon found in 6063.
4. After processing, the surface is very smooth and easy to anodize and stain. Its disadvantage is that if it is parked at room temperature for a period of time after quenching, it will bring adverse effects on the strength (parking effect).

Product Details

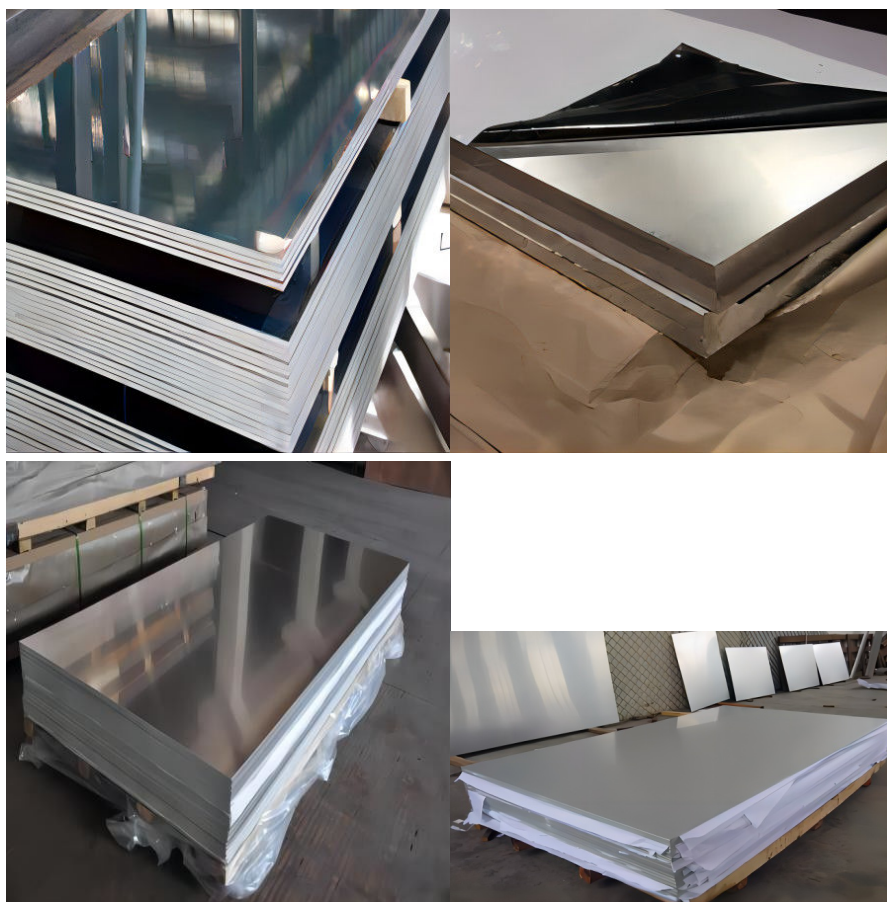


Warehouse



Packing and Shippment



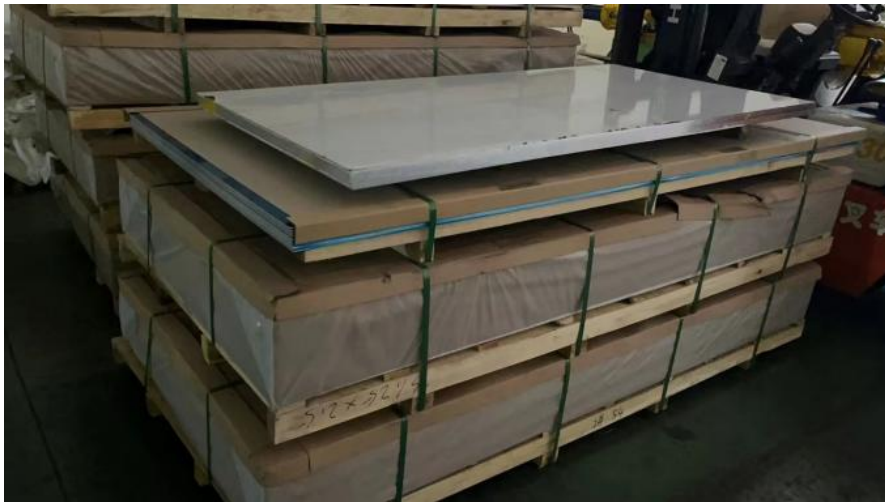

Certification



华鼎四海
Huadingsihai

QUALITY MANAGEMENT SYSTEM CERTIFICATE

This is to certify that

Jiangsu Lianzhong Metal Products (Group) Co., Ltd

Unified social credit code:91320213MABPEEF263

Registered Address:287 Guangyi Road, Liangxi District, Wuxi, Jiangsu

Audited Address:287 Guangyi Road, Liangxi District, Wuxi, Jiangsu

Has been assessed as conforming to meet the requirements of
GB/T19001-2016 / ISO9001:2015

for the scope of activities

**Metal coils, metal pipes, metal bars, metal sheets involved in the sale of related
management activities**

Certificate No:609-22-QR-08513-R0-S

Issue Date:2022-12-28

Term of validity:2025-12-27



中国认可
国际互认
管理体系
MANAGEMENT SYSTEM
CNAS C256-M

Certificate issuer:

gaofei

Company stamp:



Note: Every year, supervision and audit are required, and the certificate of conformity is valid. The status of the certificate can be scanned and can also be confirmed on the company website hdccso.com and the official website of the National Certification and Supervision Commission at www.cnca.gov.cn.

ADD: 608, floor 6, building 1, Yard 18, Huanjing road, Tongzhou District, Beijing
TEL: 010-80820858 E-mail: HDCCRZ@163.com



JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD



+8618151700330



sales02@jslzsteel.com



aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China