

3003 H14 Aluminum Gutter Coil White Surface 0.4mm 0.55mm For Fuel Tanker

Our Product Introduction


Basic Information

- Place of Origin: Jiangsu, China
- Brand Name: Chinalco
- Certification: ISO9001
- Model Number: 1000series, 2000series, 3000series, 4000series, 5000series, 6000series, 7000series, 8000series, 9000series
- Minimum Order Quantity: 1ton
- Price: Negotiable
- Packaging Details: Exporting package/wooden box package/Or per customers'requirement
- Delivery Time: 3-15 days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 20000 Ton/Tons per Month






Product Specification

- Width: 600mm-2600mm
- Certificate: ISO9001
- Grade: 3003
- Tolerance: $\pm 3\%$
- Type: Coil
- Standard: ASTM
- Highlight: 3003 H14 Aluminum Gutter Coil, Aluminum Gutter Coil For Fuel Tanker, 0.4mm Aluminum Gutter Coil

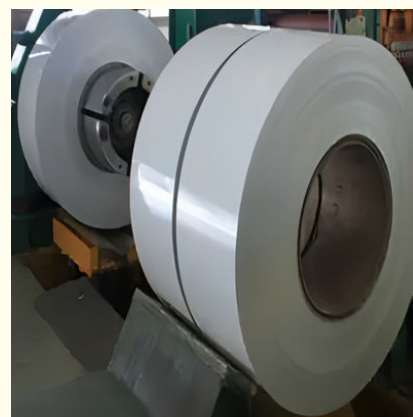

More Images



for more products please visit us on aluminium-sheetcoil.com

Product Description

3003 H14 Aluminum Gutter Coil White Surface 0.4mm 0.55mm Thickness For Fuel Tanker

3003 aluminum coil is a metal product for flying shear by casting and rolling machine after calendering and drawing bending Angle processing. Widely used in electronics, packaging, construction, machinery and other industries.

As an AL-Mn alloy, 3003 is the most widely used antirust aluminum, so 3003 alloy aluminum coil has excellent chemical properties. In terms of corrosion resistance, 3003 alloy aluminum coil is very good, which can achieve the corrosion resistance of industrial pure aluminum. It has good corrosion resistance to atmosphere, fresh water, sea water, food, organic acid, gasoline, neutral inorganic salt aqueous solution, etc., and also has good corrosion resistance in dilute acid. 3003 aluminum coil can not be strengthened by heat treatment, so the cold working method is used to improve its mechanical properties: in the annealing state has a high plasticity, in the semi-cold hardening plasticity is good, cold hardening plasticity is low, good corrosion resistance, good weldability, bad machinability.


Grade	1000,2000,3000,4000,5000,6000,7000 series
Trade Terms	EXW/FOB/CIF
Supply Ability	2000Ton/Month
Coating paint	PE/PVDF
Delivery time	Within 15-30days after we receive deposit or L/C at sight
Type	coil/sheet/strip/plate
Application	Application Used to manufacture decorative materials, such as aluminum veneers, aluminum composite panels, perforated panels, and clean plates, etc: 1) Exterior applications: wall cladding, facades, roofs and canopies, tunnels, column covers or renovations 2) Interior applications: wall cladding, ceilings, bathrooms, kitchens and balconies 3) Advertisement and market applications: display platforms signboards, fascias and shop fronts 4) Transport and industrial applications


2)3000 Series Alloy (Generally called Al-Mn Alloy, Mn is used as main alloy element)	
Alloy	3003 3004 3005 3102 3105
Temper	O/H111 H112 H12/H22/H32 H14/H24/H34 H16/H26/H36 H18/H28/H38 H114/H194, etc.
Specification	Thickness≤30mm; Width≤2200mm Length≤12000mm OR Coil (C)
Application	Decoration, heat-sink device, external walls, storage, sheets for construction, etc.
Feature	Good rust resistance, not suitable for heat treatments, good corrosion resistant performance, well welding property, good plasticity, low strength but suitable for cold working hardening

3)5000 Series Alloy (Generally called Al-Mg Alloy, the Mg is used as main alloy element)	
Alloy	5005 5052 5083 5086 5182 5754 5154 5454 5A05 5A06
Temper	O/H111 H112 H116/H321 H12/H22/H32 H14/H24/H34 H16/H26/H36 H18/H28/H38 H114/H194, etc.
Specification	Thickness≤170mm; Width≤2200mm ; Length≤12000mm
Application	Marine Grade Plate, Ring-Pull Can End Stock, Ring-Pull Stock, Automobile Body Sheets, Automobile Inside Board, The Protective Cover On Engine.
Feature	All the advantages of normal aluminium alloy, high tensile strength & yield strength, good corrosion resistant performance, well welding property, well fatigue strength, and suitable for anodic oxidation.

4)6000 Series Alloy (Generally called Al-Mg-Si Alloy, the Mg and Si are used as main alloy elements)	
Alloy	6061 6063 6082
Temper	O F, etc.
Specification	Thickness≤170mm; Width≤2200mm ; Length≤12000mm
Application	Automotive, Aluminium For Aviation, Industrial Mould, Mechanical Components, Transport Ship, Semiconductor Equipments, etc
Feature	Good corrosion resistant performance, well welding property, good oxidability, easy to spray-finishing, well oxidation coloring, good machinability.


Product Details

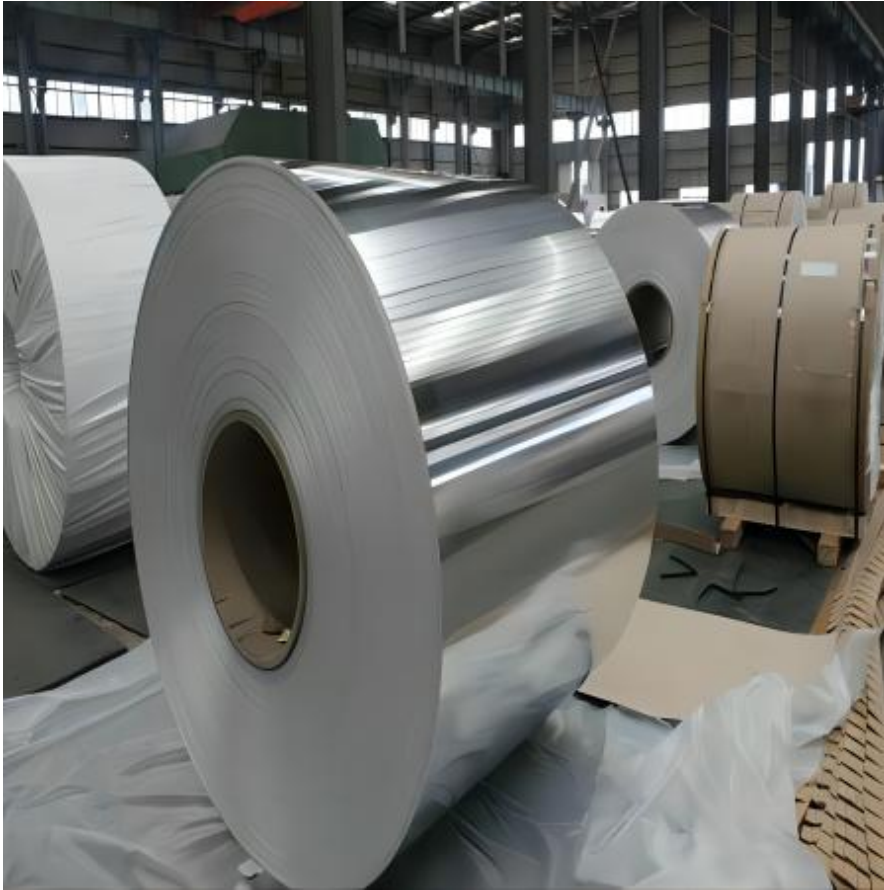


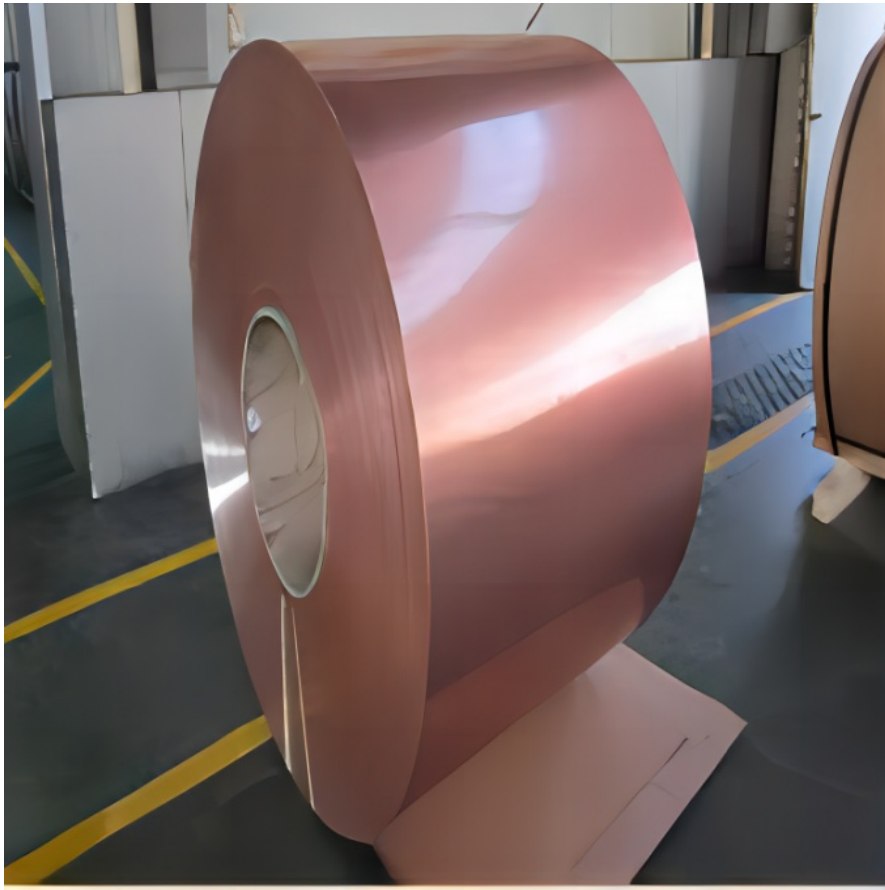


Product Line



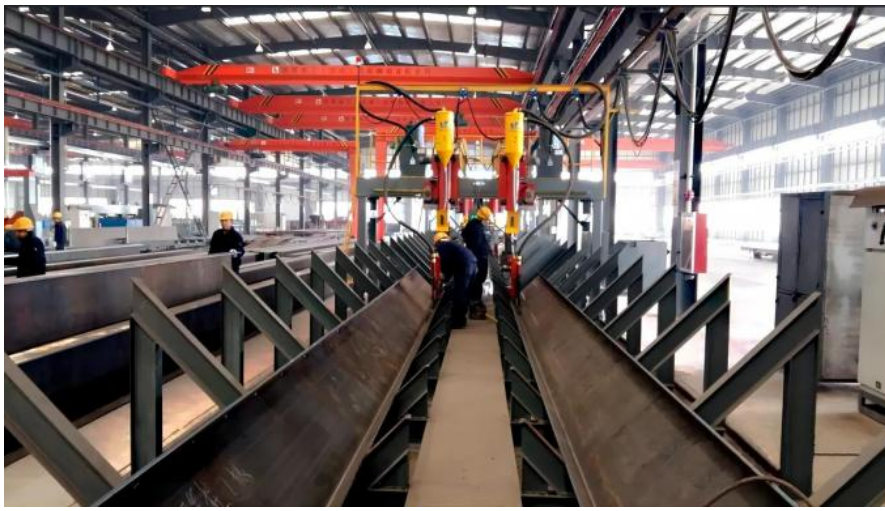

Packing

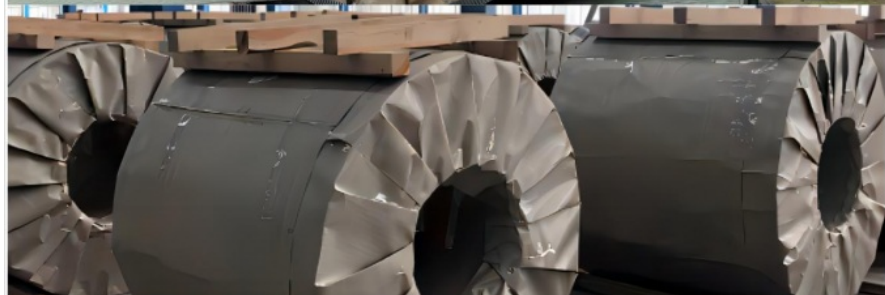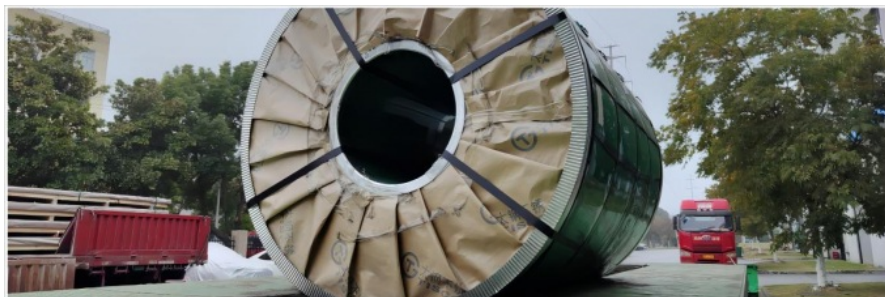

Certification



华鼎四海
Huadingsihai

QUALITY MANAGEMENT SYSTEM CERTIFICATE

This is to certify that

Jiangsu Lianzhong Metal Products (Group) Co., Ltd

Unified social credit code:91320213MABPEEF263

Registered Address:287 Guangyi Road, Liangxi District, Wuxi, Jiangsu

Audited Address:287 Guangyi Road, Liangxi District, Wuxi, Jiangsu

Has been assessed as conforming to meet the requirements of
GB/T19001-2016 / ISO9001:2015

for the scope of activities

**Metal coils, metal pipes, metal bars, metal sheets involved in the sale of related
management activities**

Certificate No:609-22-QR-08513-R0-S

Issue Date:2022-12-28

Term of validity:2025-12-27



中国认可
国际互认
管理体系
MANAGEMENT SYSTEM
CNAS C256-M

Certificate issuer:

gaofei

Company stamp:



Note: Every year, supervision and audit are required, and the certificate of conformity is valid. The status of the certificate can be scanned and can also be confirmed on the company website hdccso.com and the official website of the National Certification and Supervision Commission at www.cnca.gov.cn.

ADD: 608, floor 6, building 1, Yard 18, Huanjing road, Tongzhou District, Beijing
TEL: 010-80820858 E-mail: HDCCRZ@163.com



JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD



+8618151700330



sales02@jslzsteel.com



aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China