

1100 3003 2024 T3 Aluminum Plate Sheet Polished Bright 10 - 2500mm For Widely Use

Basic Information

Place of Origin: Jiangsu,China
Brand Name: CHALCO
Certification: ISO9001


Model Number: 1000series, 2000series, 3000series, 5000series, 6000series, 7000series

Minimum Order Quantity: 3tonPrice: Negotiable

Packaging Details: Exporting package/wooden box package etc

Delivery Time: 3-15 days

Payment Terms: L/C, T/T, Western Union
Supply Ability: 20000 Ton/Tons per Month



Product Specification


Width: 500-2500mmApplication: Construction

Model Number: 1100 5054 3003 2024
Thickness: 0.2-200mm Customized

Place Of Origin: Jiangsu, ChinaDelivery Time: 8-14 Days


Highlight: Polished Bright Aluminum Sheet Plate,

2024 T3 Aluminum Sheet Plate, 10mm Aluminum Plate Sheet



More Images








Product Description

ASTM Factory Supply 1100 5054 3003 2024 T3 Aluminum Sheet/Plate 10-2500mm Width For Widely Use

- 1, aluminum plate storage: should be stored in a dry and ventilated place, and flat on the surface, do not step on, impact.
- 2, aluminum plate handling: the four sides of the plate should be lifted at the same time, so as not to scratch the surface of the plate.
- 3, aluminum plate slotting: with slotting machine or gong machine, should use half round head milling cutter. Regardless of whether the damage to the aluminum plate is too deep, not too shallow, not easy to fold, the plastic core of 0.2-0.3mm thick should be bent with the aluminum plate to increase strength and toughness, otherwise the aluminum plate may break or the paint film breaks when bending.
- 4, aluminum plate bending: when bending the edge, the stress is uniform, forming once, do not bend repeatedly, otherwise the aluminum plate may break.
- 5, aluminum plate arc processing: special bending equipment should be used for arc processing, so that the plate gradually reach the required surface, not a bending.

	ASTM Polished Bright Surface 3003 Aluminium Sheet Plate O H12 H14 H18 H22
Alloy	1050 1060 1100 3003 3004 3105 5052 5754 6061
Thickness	1.2-7.0mm
range	
Width range	500-2500mm
Length range	500-8000mm
Film/Paper	Film coated, or paper between each sheet
Package	Standard seaworthy packing
MOQ	5 Tons
Payment terms	30%TT as deposit +70%TT before shipment
Delivery time	15-30 days after receiving the deposit
Inspection	The third party inspection is accepted
Sample	Free sample, kindly pay the delivery charge on your side
Kind attn	Customization is accepted. For more information, contact us directly pls.

Product Details

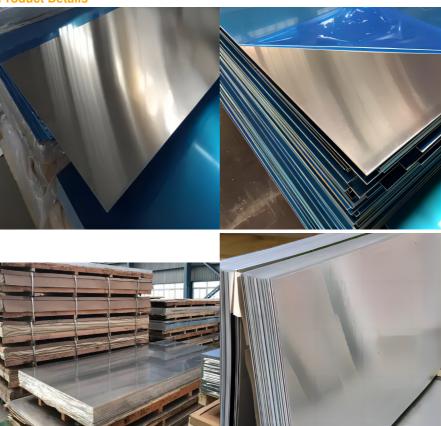




Factory



Packing and Shippment



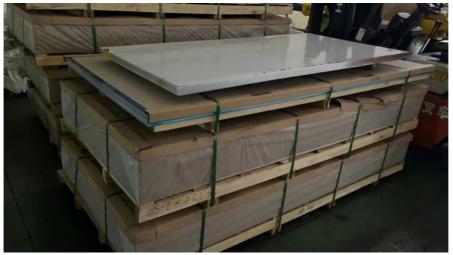



Certification









JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD

+8618151700330

sales02@jslzsteel.com

aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China