

1050 1060 Pure Aluminium Wire 6mm 3mm Diameter ISO Certificate Round Shape Roll

Basic Information

Place of Origin: Jiangsu,China
Brand Name: LIANZHONG
Certification: ISO9001

Model Number: 1000series, 2000series, 3000series, 5000series, 6000series, 7000series

Minimum Order Quantity: 3 TonsPrice: Negotiable

Packaging Details: Exporting package/wooden box package etc

Delivery Time: 7-15 days

Payment Terms: L/C, T/T, Western Union
Supply Ability: 20000 Ton/Tons per Month



Product Specification

• Product Name: Aluminum Wire • Material: Aluminum Material 1000-6000 Series Standard: 0.3-6mm Or As Required Diameter: Sample: We Can Provide It. • Trade Terms: FOB CIF CFR EXW · Highlight: 99.99% Pure Aluminium Wire, 6mm Pure Aluminium Wire, 3mm Aluminium Round Wire



Product Description

1050 1060 Pure Aluminium Wire 6mm 3mm Diameter ISO Certificate Round Shape Roll

Product Description

Aluminum wire has been used as an electrical conductor for a many years. Shortly after the beginning of modern power distribution systems being constructed in the late 1880s, electrical utilities started to use aluminum wire for power transmission lines. Aluminum has been safely and effectively used in electrical applications in the United States for more than 100 years.


Aluminum wire is an economical alternative to copper wire. It requires a larger wire gauge than copper wire to carry the same current, however it takes only one pound of aluminum wire to equal the current-carrying capacity of two pounds of copper making it an extremely attractive material for utilities, builders and others.

Produce Name	Aluminum wire	
Material	Anodized Aluminum	
Size	Dia 0.3-6mm,Please contact us for custom size	
MOQ	3 tons	
Product Usage	Great for making jewelry components wire wrapped pendants	
Payment Terms	T/T, L/C etc.	
Trade Terms	FOB CIF CFR EXW	
	Brushed,polished,mill finish, power coated,sand blast	
Standard package	Wooden pallets, Wooden cases or according to customer's requests	


Dimensions

ISiza		Min. Number of Strands	Insulation Thickness	Nomina I O.D.	Weigh	Maximum conductor resistance at temperature 20C
AWG or kcmil	mm	n	mm	mm	kg/km	Ω/km
	13.21	35	3.04	19.3	583	0.232
300	14.48	35	3.04	20.6	669	0.194
350	15.65	35	3.04	21.7	754	0.166
500	18.69	35	3.04	24.8	1004	0.116
700	22.28	58	3.43	29.1	1387	0.0829

Product Details

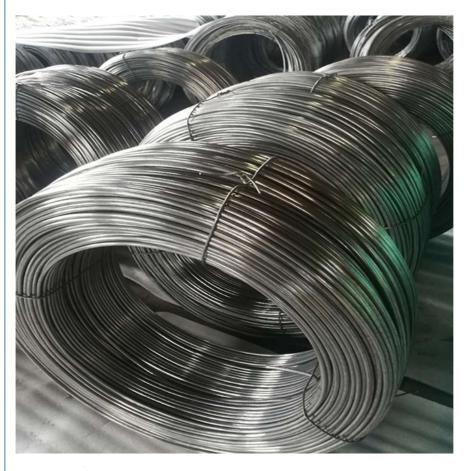

Packing and Shipping

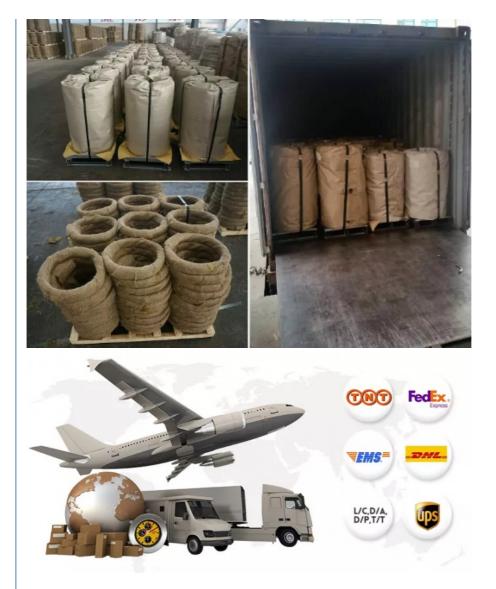

Recommend Products




Certificate





Production Line

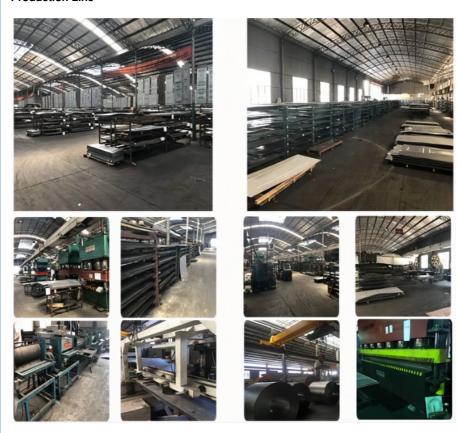

FAQ

Q1: What's your terms of payment?

A: 30%T/T as the upfront deposit, 70% before delivery, We will show you the photos and package before you pay the balance.

Q2: What's the terms of delivery? A: EXW, FOB, CFR, CIF

Q3: What's the terms of packing?

A: Generally,we pack our goods in bundles or coils with rods or belts, we could also pack the goods as the customers' requirement.

Q4: What's your delivery time?

A: For stocks, we could transport the goods to loading port within 7 work days after we received the deposit. For production period, it usually takes about 15 days to 30 days after we received the deposit.

Q5: Could you produce according to the samples?

A: Yes, we can customer-made by your samples or technique drawings, we can build the mold and fixtures.

JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD

+8618151700330

sales02@jslzsteel.com



aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China