

# ASTM 5083 H116 Aluminium Sheet Alloy Plate Marine Grade For Ship Building

Exporting package/wooden box package/Or

per customers'requirement

L/C, T/T, Western Union

2000 Ton/Tons per Month

Aluminum Sheet

Jiangsu, China

Chinalco

ISO9001

Negotiable

3-15 days

5083

1ton

## **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:




## Product Specification

- Product Name:
- Thickness:
- Alloy Or Not:
- Standard:
- Surface:
- Processing Service:
- Highlight:

0.6-100mm Or As Required
Alloy
ASTM-B209, EN573-1, GB/T3880.1-2006
Coated,embossed,mill Finish,polished,hairline,etc.
Bending, Decoiling, Welding, Punching, Cutting

5083 H116 Aluminium Sheet, Alloy Plate Aluminium 5083 Sheet, Alloy Aluminium Plate 100mm




### High Quality ASTM 5083 H116 Aluminium Sheet Alloy Plate Marine Grade For Ship Building

#### **Product Description**

Aluminium 5083 is known for exceptional performance in extreme environments. 5083 is highly resistant to attack by both seawater and industrial chemical environments. Alloy 5083 also retains exceptional strength after welding. It has the highest strength of the non-heat treatable alloys but is not recommended for use in temperatures in excess of 65°C.

Product	Aluminum Sheet
Property	Anti-Corrosion, Heat Resistant
Surface	Coated,embossed,mill finish,polished,hairline,etc.
Production Process	Cold Rolled, Hot Rolled
Temper	O,H14,H24,H32,H112 Etc;T4,T651 Etc
Thickness	0.2mm - 60mm or as required
Width	500mm - 2300mm or as required
Length	1000mm - 11000mm or as required
Payment Term	TT,100% LC at sight, West Union
Package	Export wooden pallets, Craft paper, Anti-Blushing Agent or according to your requirements.
Delivery Time	Future goods: 20-30 Work days, Ready Stock:7-10 days.
Quality of	Totally free from defects like white rust, adge damage, camber, dents,
Material	holes, break lines, scratches.
Kind Attention	Specification can be customized as the customer's requirements.

#### **Product Details**

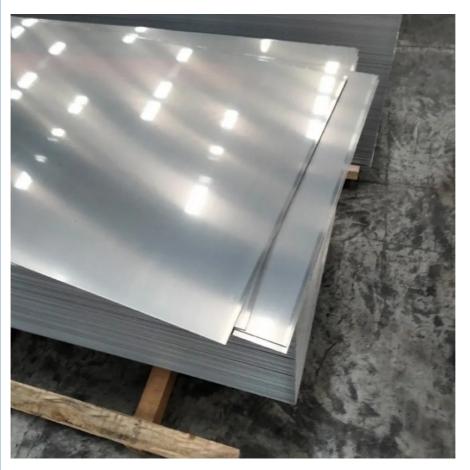


Application



Factory



#### **Recommend Products**

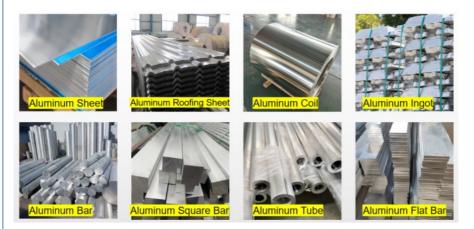

#### Packing & Shipping

20ft GP:5898mm(Length)x2352mm(Width)x2393mm(High), about 24CBM,27MTS 40ft GP:12032mm(Length)x2352mm(Width)x2393mm(High) ,about 54CBM,27MTS 40ft HC:12032mm(Length)x2352mm(Width)x2698mm(High), about 54CBM,27MTS





#### Certification



#### FAQ

1. How can I get a quotation from you ? You can leave us message, and we will reply every message in time. Or we may talk on line by Trademanager. And you can also find our contact information on contact page.

2.Can I get samples before order ? Yes, of course. we can produce by your samples or technical drawings.

3. What is your delivery time ? The time of delivery is usually around 7-10 days. We can send out in 2-5 days, if it has stock.

