


ASTM 5754 Aluminium Coil Anodizing 5052 H112 10mm Thick With Double Sided Film

Our Product Introduction


Basic Information

- Place of Origin: Jiangsu, China
- Brand Name: Chinalco
- Certification: ISO9001
- Model Number: 1000series, 2000series, 3000series, 4000series, 5000series, 6000series, 7000series, 8000series, 9000series
- Minimum Order Quantity: 1ton
- Price: Negotiable
- Packaging Details: Exporting package/wooden box package/Or per customers'requirement
- Delivery Time: 3-15 days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 20000 Ton/Tons per Month

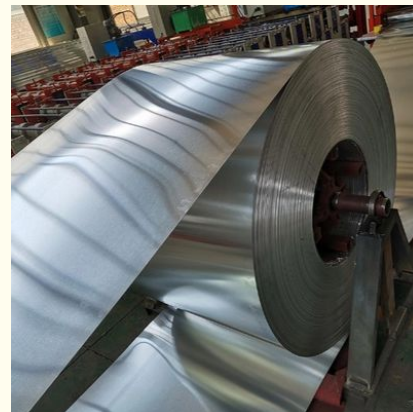

Product Specification

- Product Name: Aluminum Coil
- Grade: 1050, 1060, 1100, 3003, 5052, 5005, 5754, 5083, 6061, 8081 Etc
- Surface Treatment: Mill Finish, Anodizing, Polish, Brush Etc.
- Color: Silver Or As Required
- Thickness: 0.6-20mm Or As Required
- Trade Terms: FOB CIF CFR EXW
- Advantage: Excellent Processing Function, Excellent Corrosion Resistance
- Application: Refrigerator, Air Condition, Automobile, Water Heater
- Highlight: **5052 Aluminium Coil, 10mm Thick Aluminium Coil, Double Sided Film Aluminium Coil**

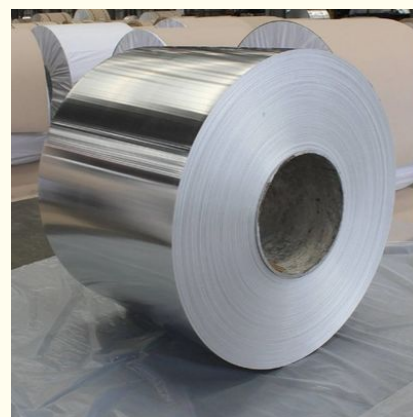

for more products please visit us on aluminium-sheetcoil.com

Product Description

ASTM 5754 Aluminium Coil Anodizing 5052 H112 10mm Thick With Double Sided Film

Product Description

Aluminum is a silver-white light metal, relatively soft, density 2.7g/cm³, melting point 660.4°C, boiling point 2467°C, aluminum and aluminum alloys have many excellent physical properties, has been very widely used. Aluminum has good reflection performance of light, reflecting ultraviolet light is stronger than silver, the purer aluminum is, its reflection ability is better, and the method of vacuum aluminum plating is commonly used to make high-quality mirrors. Vacuum aluminized film combined with polysilicon film becomes a cheap and lightweight solar cell material. Aluminum powder can maintain a silvery luster, often used to make paint, commonly known as silver powder. Pure aluminum conducts electricity very well, second only to silver and copper. In the electric power industry, it can replace part of copper for wires and cables.

	Thickness (mm)	Width (mm)	Temper
A1050,A1060,A1070,A1100	0.2-8.0	20-2300	O,H12,H14,H16,H18,H22,H24,H26
A3003,A3004,A3105	0.2-8.0	20-2300	O,H12,H14,H16,H18,H22,H24,H26
A5052,A5005,A5083,A5754	0.2-8.0	20-2300	O,H12,H14,H34,H32,H36,H111,H112
A6061,A6082,A6063	0.2-8.0	20-2300	T4,T6,T651
A8011	0.2-8.0	20-2300	O,H12,H14,H16,H18,H22,H24,H26
Customerize size	Size can be produced as per clients requirement		
Surface	Mill finish ,Color coated(PVDF& PE),Stucco Embossed ,Bright Polish,Anodizing		
Quality Standard	ASTM B209,EN573-1		
MOQ per size	1 ton		
Payment Terms	TT OR LC at sight		
Delivery time	Within 25 days after receipt the lc or deposit		
Material Quality	Tension levelled ,flat ,Free of defects like oil stain,Roll Marks,Waves,Dents		
	scratches etc ,A+++ quality, production process passed sgs and bv inspection		
Application	Construction ,Building,Decoration ,Curtain Wall ,Roofing,Mould,Lighting		
	Curtain wall, ship building,Aircraft,Oil Tank ,Truck Body etc		
Packing	Standard export worthy wooden pallets and standard packing is about 2 tons/pallet		
	Pallet weight also can be as per client's requirement		

Aluminum Grade	Features and common models
1000 Series	Industrial Pure Aluminum(1050,1060 ,1070, 1100)
2000 Series	Aluminum-copper alloys(2024(2A12), LY12, LY11, 2A11, 2A14(LD10), 2017, 2A17)
3000 Series	Aluminum-manganese alloys(3A21, 3003, 3103, 3004, 3005, 3105)
4000 Series	Al-Si alloys(4A03, 4A11, 4A13, 4A17, 4004, 4032, 4043, 4043A, 4047, 4047A)
5000 Series	Al-Mg alloys(5052, 5083, 5754, 5005, 5086,5182)
6000 Series	Aluminum Magnesium Silicon Alloys(6063, 6061, 6060, 6351, 6070, 6181, 6082, 6A02)
7000 Series	Aluminum, Zinc, Magnesium and Copper Alloys(7075, 7A04, 7A09, 7A52, 7A05)
8000 series	Other Aluminum alloys,Mainly used for thermal insulation materials, aluminum foil, etc.(8011 8069)

Product Detail



Product Line



Mechanical cutting



Extrusion




Slitting



Subsection



Surface treatment

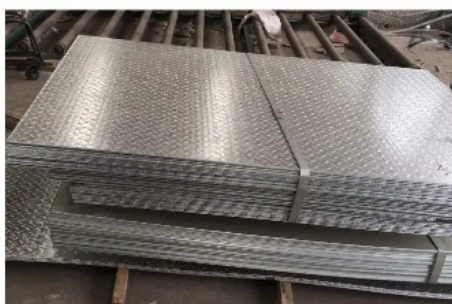


Checkered


Test



Recommend Products

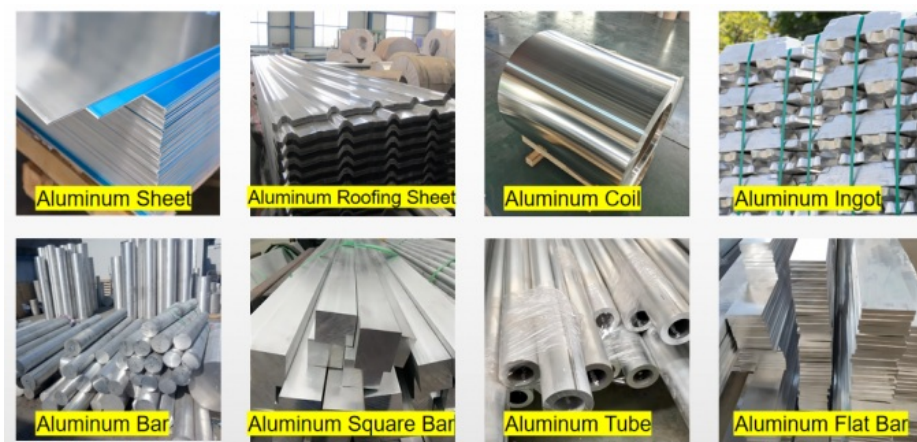


Application

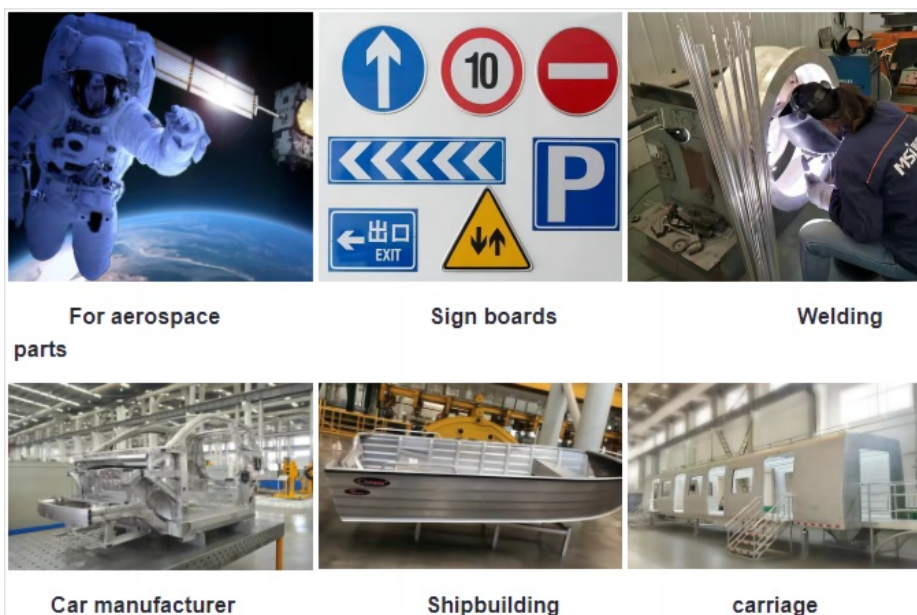

Packing & Shipping

- 1) Standard export package,suit for all kinds of transport,or as required.
- 2) All standard steel products are stocked, timely shipping as per clients request.

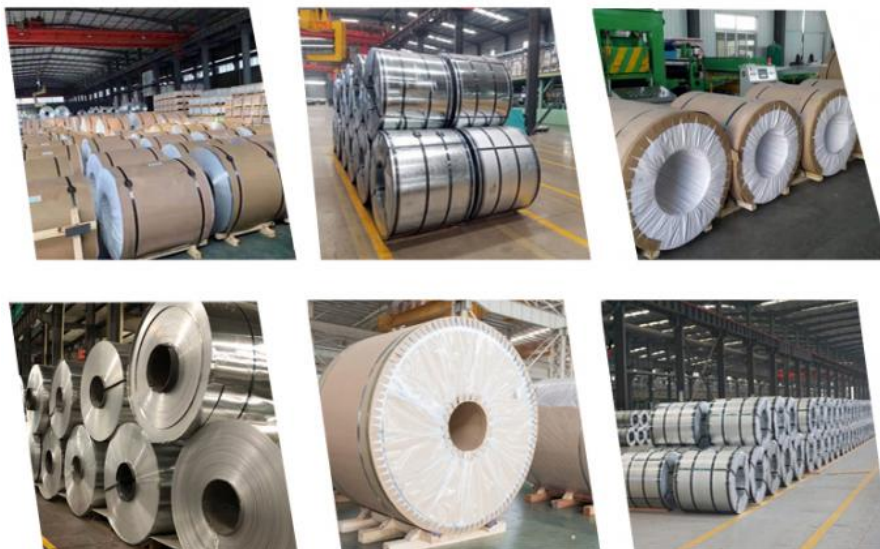

Certification



FAQ

1. How about your delivery time?

Generally, it will take 20 to 30 days after receiving your advance payment. The specific delivery time depends on the items and the quantity of your order.

2. How can we guarantee quality?

Always a pre-production sample before mass production;
Always final Inspection before shipment;

3.What services can we provide?

Accepted Delivery Terms: FOB,CFR,CIF,EXW ;

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,Credit Card,PayPal,Western Union;

Language Spoken:English,Chinese,Spanish,Japanese,Portuguese,German,Arabic,French,Russian,Korean,Hindi,Italian



JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD



+8618151700330



sales02@jslzsteel.com



aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China