


6mm Thick 5052 Aluminium Alloy Sheet For Marine Aerospace

Our Product Introduction


Basic Information

- Place of Origin: Jiangsu, China
- Brand Name: LIANZHONG
- Certification: ISO9001
- Model Number: 5052 5005
- Minimum Order Quantity: 1 ton
- Price: Negotiable
- Packaging Details: Exporting package/wooden box package/Or per customers' requirement
- Delivery Time: 3-15 days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 2000 Ton/Tons per Month

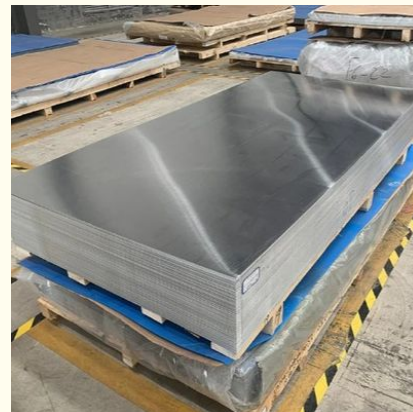

Product Specification

- Product Name: Aluminum Sheet
- Grade: 5052
- Temper: H112 H116 H22 H32
- Thickness: 6mm
- Alloy Or Not: Alloy
- Shape: Flat Plate
- Delivery Time: 7-15 Days, depends On The Quantity
- Processing Service: Bending, Decoiling, Welding, Punching, Cutting
- Highlight: **Aerospace 5052 Aluminium Alloy Sheet, Marine Aluminium Alloy Sheet, 6mm 5052 Aluminum Plate**

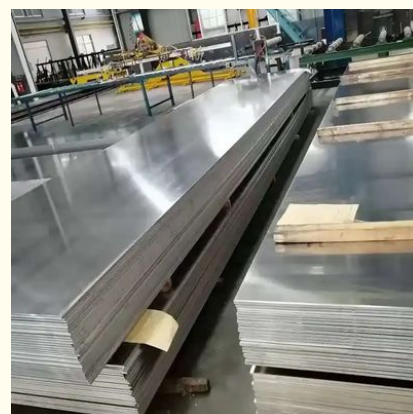

for more products please visit us on aluminium-sheetcoil.com

Product Description


6mm Thick 5052 Aluminium Alloy Sheet For Marine and Aerospace Application

Product Description

5052 aluminum alloy is the most widely used rust proof aluminum, which has high strength, especially fatigue resistance: high plasticity and corrosion resistance, cannot be strengthened by heat treatment, good plasticity during semi cold work hardening, low plasticity during cold work hardening, good corrosion resistance, good weldability, poor machinability, and can be polished. The main use is for low load parts that require high plasticity and good weldability, working in liquid or gas media, such as oil tanks, gasoline or lubricant conduits, various liquid containers, and other low load parts made by deep drawing: wire is used to make rivets.

Product	5052
Temper	H112 H116 H22 H32
Specification	Thickness 6mm ,width 600-1500mm, length 1000-6000mm
Application	Marine Grade Plate, Ring-Pull Can End Stock, Ring-Pull Stock, Automobile Body Sheets, Automobile Inside Board, The Protective Cover On Engine.
Feature	All the advantages of normal aluminium alloy, high tensile strength & yield strength, good corrosion resistant performance, well welding property, well fatigue strength, and suitable for anodic oxidation.

Product Details

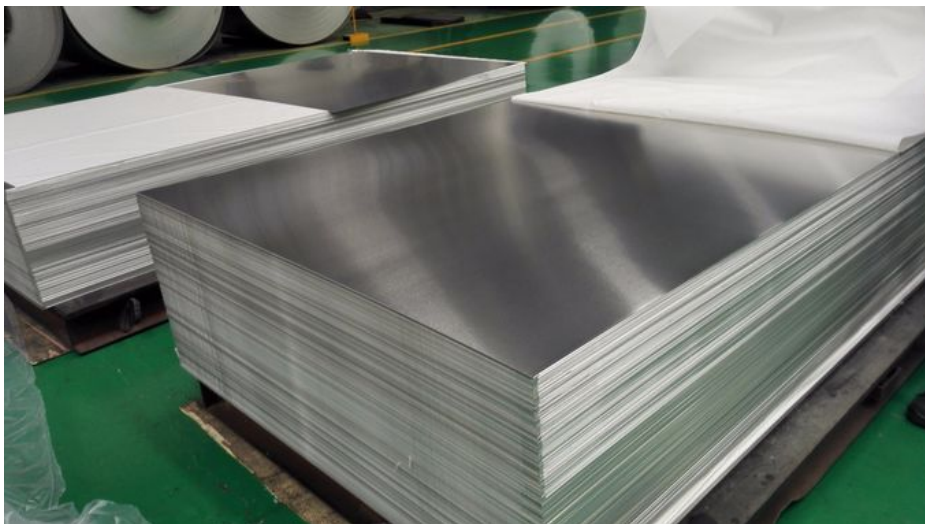




Application



Recommend Products

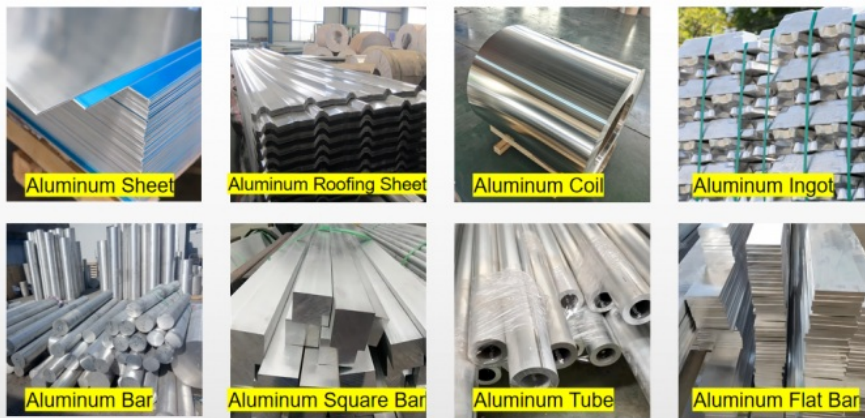

Packing & Shipping

20ft GP: 5898mm(Length)x2352mm(Width)x2393mm(High), about 24CBM, 27MTS
 40ft GP: 12032mm(Length)x2352mm(Width)x2393mm(High), about 54CBM, 27MTS
 40ft HC: 12032mm(Length)x2352mm(Width)x2698mm(High), about 54CBM, 27MTS



Certification



FAQ

1. How can I get a quotation from you ?

You can leave us message, and we will reply every message in time. Or we may talk on line by Trademanager. And you can also find our contact information on contact page.

2.Can I get samples before order ?

Yes, of course. we can produce by your samples or technical drawings.

3. What is your delivery time ?

The time of delivery is usually around 7-10 days.We can send out in 2-5 days, if it has stock.



JIANGSU LIANZHONG METAL PRODUCTS (GROUP) CO., LTD



+8618151700330



sales01@jslzsteel.com



aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China