

ASTM 7022 7075 Aluminum Pipe Tube SCH40 SCH60 Wall Customized For Decoration

Basic Information

- Place of Origin:
- Brand Name:
- Certification: ISO9001

Jiangsu, China

LIANZHONG

Negotiable

3-15 days

- Model Number:
- Minimum Order Quantity: 2 Tons
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 20000 Ton/Tons per Month



Product Specification

- Product Name:
- Suface:
- Surface Treatment:
- Grade:
- Material:
- Usage:
- Highlight:

Aluminum Pipe
Anodized, Mill Finished
Anodizing, Powder Coated, Painted Etc.
7000 Series, 7020 7022 7050 7075
Aluminum Alloy
Construction, building Material, industry

1000series, 2000series, 3000series,

5000series, 6000series, 7000series

Standard Export Seaworthy Package

ASTM 7022 Aluminum Pipe Tube, SCH60 Aluminum Tube Pipe, Customized Anodized Aluminum Pipe



Our Product Introduction

ASTM 7020 7022 7050 7075 Aluminum Tube SCH40 SCH60 Wall Thickness Customized Size For Decoration

Product Introduction

Advantages of aluminum tubes:

1. Advantages of welding technology: The welding technology of thin-walled copper-aluminum tubes suitable for industrial production is known as a world-class problem and is the key technology for replacing copper with aluminum for connecting tubes of air conditioners.

2. Advantages of service life: From the perspective of the inner wall of the aluminum tube, since the refrigerant does not contain moisture, the inner wall of the copper-aluminum connecting tube will not corrode.

 Energy-saving advantages: The connection pipeline between the indoor unit and the outdoor unit of the air conditioner, the lower the heat transfer efficiency, the more energy-saving, or the better the thermal insulation effect, the more power-saving.
Excellent bending performance, easy to install and move.

Item	Aluminum pipe/tube					
Standard	GB/T3190-2008;GB/T4437.1-2000,etc					
Temper	O-H112 T3-T8 T351-651					
Grade	7000 Series:7003,7005,7050,7075,7475,7A01,7A03,7A05,etc.					
Side Length	Standard size or custom size.					
Wall Thickness	0.5-150mm					
Length	5.8m/6m/9m/12m, as required.					
Surface Finish	Brushed,polished,mill finish, anodizing, etc.					
Application	automobile, ship, aerospace, aviation, electronics, agricultural					
Payment Terms	T/T,L/C					
Delivery Time	15 days after order is confirmed					
Standard package	Wooden pallets, Wooden cases or according to customer's requests					

Product Details



Sample Room




Chemical Composition

Garde	Chemical composition								
Galue	Si	Fe	Cu	Mn	Mg	Zn	Ti	Other	Al
1050	0.25	0.4	0.05	0.05	0.05	0.05	0.03	0.03	99.5
1060	0.25	0.35	0.05	0.03	0.03	0.05	0.03	0.03	99.6
1100	Si+Fe:0.95		0.05-0.2	0.05	-	0.1	-	0.15	99
2A12	0.5	0.5	3.8-4.9	0.3-0.9	1.2-1.8	0.3	0.15	1	remains
2017	0.2-0.8	0.7	3.5-4.5	0.4-0.1	0.4-0.8	0.25	0.15	0.15	remains
2014	0.5-1.2	0.7	3.9-5	0.4-1.2	0.2-0.8	0.25	0.15	0.15	remains
3003	0.6	0.7	0.05-0.2	1.0-1.5	-	0.1	-	0.15	remains
3005	0.6	0.7	0.3	1.0-1.5	0.2-0.6	0.25	0.1	0.15	remains
3105	0.6	0.7	0.3	0.3-0.8	0.2-0.8	0.4	0.1	0.15	remains
5005	0.3	0.7	0.2	0.2	0.5-1.1	0.25	-	0.15	remains
5052	0.25	0.4	0.1	0.1	2.2-2.8	0.1	-	0.15	remains
5083	0.4	0.4	0.1	0.4-1	4.0-4.9	0.25	0.15	0.15	remains
5182	0.2	0.35	0.15	0.2-0.5	4.0-5.0	0.25	0.15	0.15	remains
5754	0.4	0.4	0.1	0.5	2.6-3.6	0.2	0.15	0.15	remains
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.25	0.15	0.15	remains
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.15	remains
6082	0.7-1.3	0.5	0.1	0.4-1	0.6-1.2	0.2	0.1	0.15	remains
7075	0.4	0.5	1.2-2.0	0.3	2.1-2.9	5.1-5.6	0.2	0.15	remains

Application



Certification

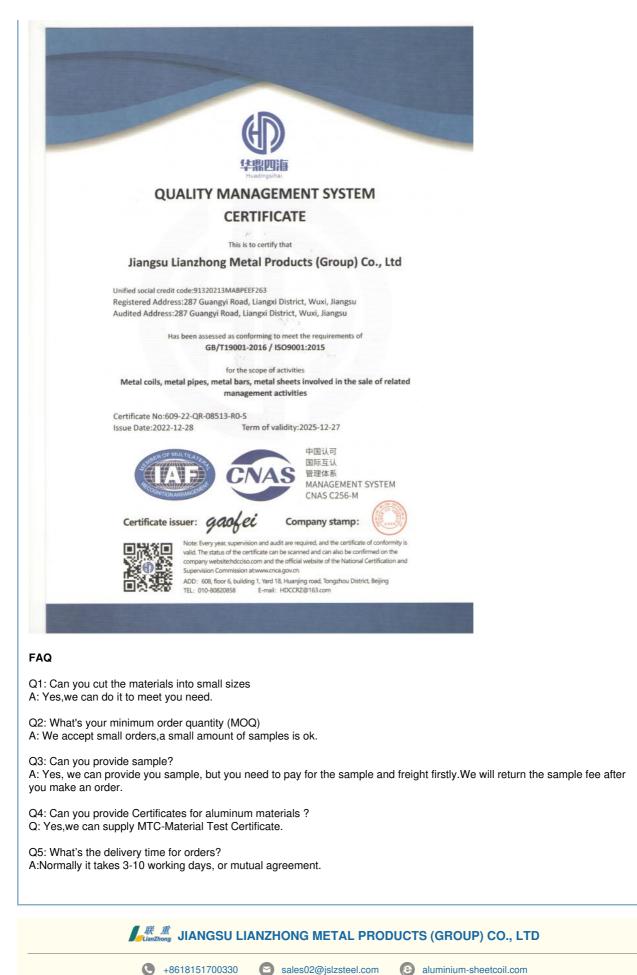

@ aluminium-sheetcoil.com

Guang Yi Columbus B Tower, Wuxi, Jiangsu, China